

# Profile Base Hooded Roof Fan

## COMPLETELY WEATHERPROOF

- Simple installation - no overflashings
- Fibreglass/alloy construction
- Birdmesh fitted
- No upstand required

CUTS INSTALL  
TIME BY 50%

SAVE 24%  
OF CAPITAL  
COST!




Shown here with  
optional extended  
spigot.

### OPTIONS


- Intrinsically safe motors
- Hazardous locations (flameproof)
- Beltdrive and IP56 motor
- Sizes ranging from 400mm to 1,200mm in diameter
- Motor Power - 0.55kW to 2.20kW
- Air Volume - 1,484L/s to 14,000L/s

MODEL No.	FAN DIA. (mm)	MOTOR SPEED (RPM)	MOTOR POWER (kW)	FREE AIR VOLUME (L/s)	VOLTAGE (V)	BASE
7-40241	400	1440	0.55	1484	240	CI/TD/SS/SD
7-40243	400	1440	0.55	1484	415	CI/TD/SS/SD
7-60161	600	960	0.37	3019	240	CI/TD/SS/DR/SD/LS
7-60163	600	960	0.37	3019	415	CI/TD/SS/DR/SD/LS
7-60241	600	1440	1.10	4300	240	CI/TD/SS/DR/SD/LS
7-60243	600	1440	1.10	4300	415	CI/TD/SS/DR/SD/LS
7-80123	800	720	0.55	5400	415	CI/TD/SS
7-80163	800	960	1.10	6800	415	CI/TD/SS
7-10123	1000	720	1.50	10000	415	CI/TD/SD/LS
7-12123	1200	720	2.20	14000	415	CI/TD/SD/LS


# Profile Base Options

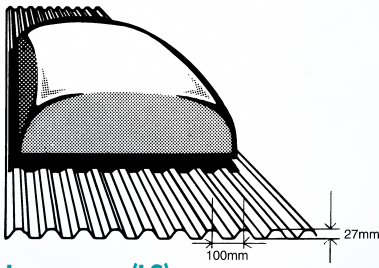


**Longspan (LS)**  
600mm - 1200mm

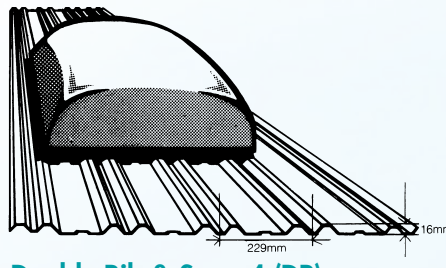


**Double Rib & Span 4 (DR)**  
600mm

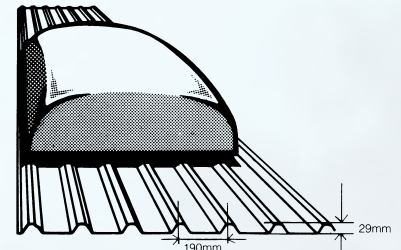


**Trimdek (TD)**  
400mm - 600mm - 800mm  
1000mm - 1200mm

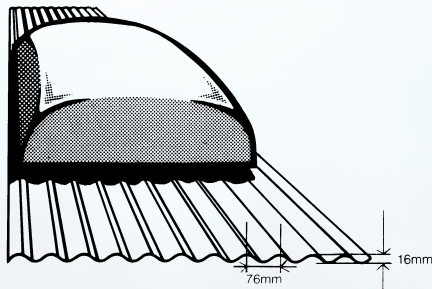

**Corrugated Iron (CI)**  
400mm - 600mm - 800mm  
1000mm - 1200mm

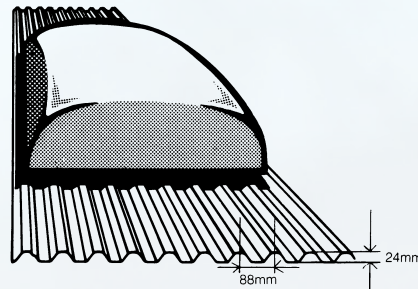

**Spankdek (SD)**  
400mm - 600mm  
1000mm - 1200mm

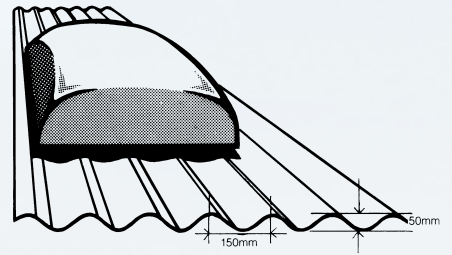

**Super Six (SS)**  
400mm - 600mm - 800mm

\*Other profiles are available - please ask for details.



## Colour Options



A wide range of colour options are available - Please contact us for an up-to-date colour selector.