


Side Wall Exhaust Fans



LOW
NOISE

- Cross flow applications
- Inlet/outlet guards
- Weatherproof louvres
- Belt drive - spring tensioned
- Galvanised - weatherproof
- Inlet/outlet guards
- Ideal for use in agriculture
- Fan Speed - 360 rpm to 500 rpm
- Motor Power - 0.37kW to 3kW
- Air Volume - 3,200L/s to 18,880L/s
- Sizes ranging from 600mm to 1,400mm in diameter

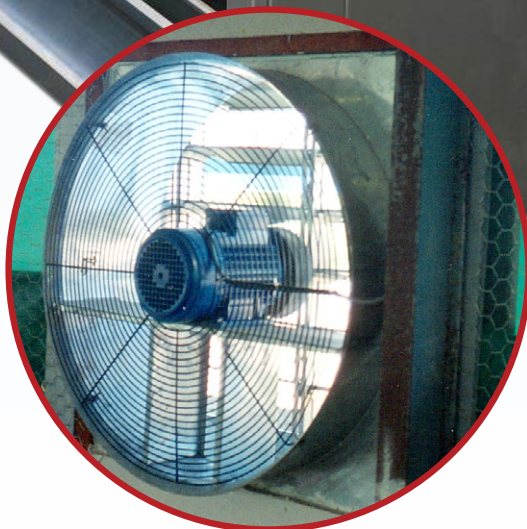

ALL THE FRESH AIR YOU COULD EVER NEED - ALL FROM ONE PLACE



**GALVANISED
& COMPLETELY
WEATHER-
PROOF**

MODEL NUMBER	FAN DIA. (mm)	MOTOR SPEED (RPM)	MOTOR POWER (kW)	FREE AIR VOLUME (L/s)	VOLTAGE (V)
18-67163	600	960	0.37	3200	415
18-77163	770	960	0.37	4400	415
18-90123	900	720	0.55	5800	415
18-14063	1400	1440	0.75	11300	415
18-14073	1400	1440	1.10	13500	415
18-14083	1400	1440	1.50	14650	415
18-141083	1400	1440	2.20	16250	415
18-142093	1400	1440	3.00	18880	415