

# Belt Drive Axial Flow Fans




**EXTERNAL  
GREASE  
POINTS**

- Australian made
- Hot dipped galvanised
- Aerodynamic belt tube
- Heavy industrial rolled casing

## OPTIONS

- Aluminium or stainless steel
- Bifurcated belt-bearing tube
- Intrinsically safe motors
- Hazardous locations (flameproof)
- Custom size
- Sizes ranging from 300mm to 1,500mm
- Motor Power - 0.55kW to 5.50kW
- Air volume - 654L/s to 25,500L/s

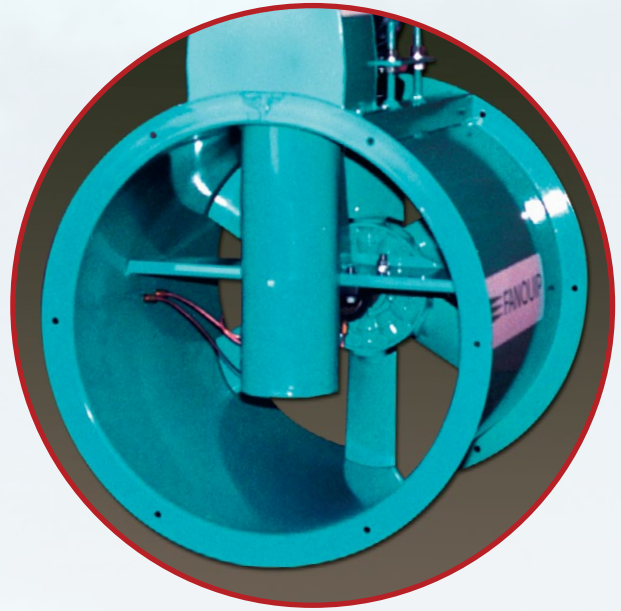

MODEL No.	FAN DIAMETER (mm)	SPEED (RPM)	POWER (kW)	FREE AIR VOLUME (L/s)	VOLTAGE (V)
<b>12-30241</b>	300	1440	0.55	654	240
<b>12-30243</b>	300	1440	0.55	654	415
<b>12-30481</b>	300	2880	0.75	1397	240
<b>12-30483</b>	300	2880	0.75	1397	415
<b>12-40241</b>	400	1440	0.55	1500	240
<b>12-40243</b>	400	1440	0.55	1500	415
<b>12-40481</b>	400	2880	1.50	2576	240
<b>12-40483</b>	400	2880	1.50	2576	415
<b>12-50241</b>	500	1440	0.55	2459	240
<b>12-50243</b>	500	1440	0.55	2459	415
<b>12-60161</b>	600	960	0.37	3274	240
<b>12-60163</b>	600	960	0.37	3274	415
<b>12-60241</b>	600	1440	1.10	4416	240
<b>12-60243</b>	600	1440	1.10	4416	415
<b>12-70163</b>	700	960	1.10	5216	415
<b>12-70243</b>	700	1440	1.50	5520	415
<b>12-80123</b>	800	720	0.55	5679	415
<b>12-80163</b>	800	960	1.10	7073	415
<b>12-80243</b>	800	1440	3.00	9228	415
<b>12-10163</b>	1000	960	2.20	11600	415
<b>12-12123</b>	1200	720	3.00	16600	415
<b>12-15163</b>	1500	960	5.50	25500	415